

### POINT 99


#### Extra strong glue

POINT 99 is a versatile, high-strength synthetic adhesive based on synthetic rubber with fast initial adhesion. It is recommended to glue many construction materials during repair and construction work outdoors and indoors. Suitable for baseboards, thresholds, panels, sockets, mineral and stone wool, ceramic tiles, carpets, etc. for gluing finishing elements. After hardening, it forms an elastic and extremely strong seam.

#### Advantages

- Long lasting and extremely strong seam.
- Elastic.
- Excellent adhesion to many building materials, porous and non-porous.
- Suitable for indoor and outdoor use.
- Water and low temperature resistant.
- Can be painted.
- Polystyrene can be glued on them.

#### Perfect adhesion with:

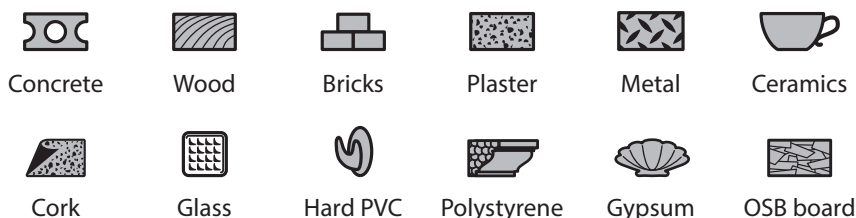

#### Areas of application

- Bonding of rigid PVC and wood panels and boards.
- Bonding of skirting boards, door edgings, mailboxes.
- Bonding of thermal insulation and sound insulation materials.
- Bonding of rosettes and polyurethane cornices.
- Bonding of ceramic tiles.

#### Not suitable for use

Gluing glass.



## TECHNICAL DATA SHEET

### Technical Specifications

Indicator	Value
Base material	synthetic rubber
Colour	beige
Tensile strength (adhesion force)	30 kg / cm <sup>2</sup>
Working environment temperature	+10 °C ... +30 °C
Density	1.25 g / ml
Correction time	10-15 min.
Full hardening	48 h
Consumption, 4 mm seam	25 m
Dry balance	75%
Thermal resistance after hardening	-20 °C ... +60 °C
Storage temperature	+5 °C ... +25 °C

### Users manual

All surfaces must be dry, dust-free, clean, free of grease and oil. Cut off the end of the cartridge tip and screw the nozzle included in the kit onto it. Insert the cartridge into the syringe gun and fill the nozzle with glue by pressing the trigger on the gun several times. Squeeze the glue on one of the surfaces to be glued with dots or strips. Press the adhesive surface with each other and separate again for 3-5 minutes. Then reconnect by pressing firmly. For 2-3 minutes, a small correction is possible without separating the details. Best conditions for gluing: 15-20 °C and relative humidity 60%. Under other environmental conditions, a longer or shorter curing time is possible. Residues of uncured adhesive can be removed with acetone, after curing only mechanically. It is recommended to perform pilot tests before gluing.

### Packaging

280 ml plastic cartridge, in a box of 12 cartridges.  
80 ml metal tube, in a box of 10 tubes

### Storage conditions

Guaranteed shelf life - 24 months from the date of manufacture, if stored in closed original packaging in a dry and cool place from +5 °C to +25 °C. The product must be stored in accordance with the storage requirements for flammable materials.

### Safety instructions

The safety data sheets of the product must be read before use. Safety data sheets are available upon request from official distributors.

### Waste management

Completely empty the package and dispose of as required.